


**Elektrischer Anschluss / Raccordement électrique / Electrical connection**

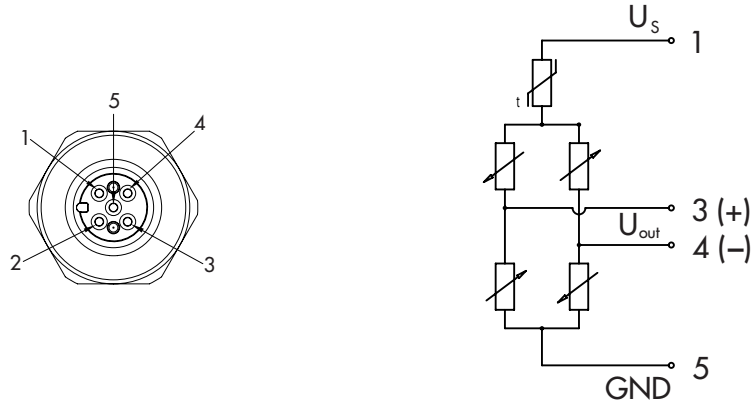

Range	Output	Load resistance	$U_{\text{SUPPLY}}$
2.5 ... 6 bar	1.7mV/V	6.0 k $\Omega$ $\pm$ 30 %	max. 15 VDC
10 ... 600 bar	2 mV/V	6.0 k $\Omega$ $\pm$ 30 %	max. 15 VDC

**Anziedrehmoment Druckanschluss / Couple de serrage raccord de pression / Torque moment pressure connection**

max. 25Nm

**Betriebstemperatur / Température de service / Operating temperature**

-25°C...+125°C (-15...+260°F)

**Lagertemperatur / Température de stockage / Storage temperature**

-25°C ... +125°C (-15...+260°F)


**Medientemperatur / Température de fluide / Media temperature**

-25°C ... +125°C (-15...+260°F)


## Überdruck / Surpression / Overpressure

Nenndruck pression nominal nominal pressure		Überdruck Surpression Over pressure	
[bar]	[psi]	[bar]	[psi]
0 ... 2.5	0 ... 35	5	70
0 ... 6.0	0 ... 90	12	170
0 ... 10	0 ... 150	20	290
0 ... 16	0 ... 230	32	460
0 ... 25	0 ... 350	50	725
0 ... 40	0 ... 500	80	1160
0 ... 60	0 ... 750	120	1700
0 ... 100	0 ... 1450	200	2900
0 ... 160	0 ... 2000	320	4000
0 ... 250	0 ... 3500	500	7000
0 ... 400	0 ... 5000	800	10000
0 ... 600	0 ... 7500	1000	14500


## Massbilder / Cotes d'encombrement / Dimensions

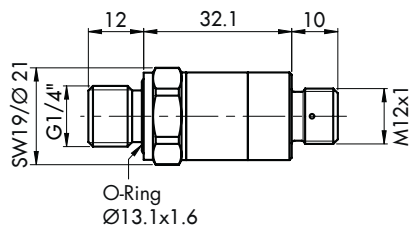

8822.XX.XXXX.35.XX  
0 ... 2.5 bar

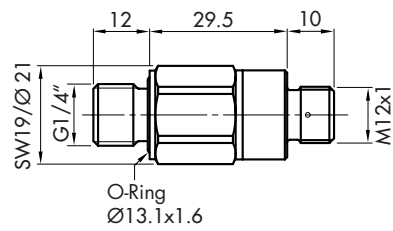

8822.XX.XXXX.35.XX  
0 ... 6 bis/à/to 0 ... 600 bar



8822.XX.XXXX.XX.33